





Product overview

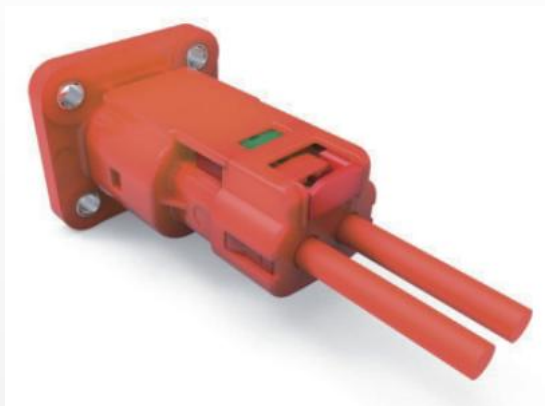

GVA Series HV Connector

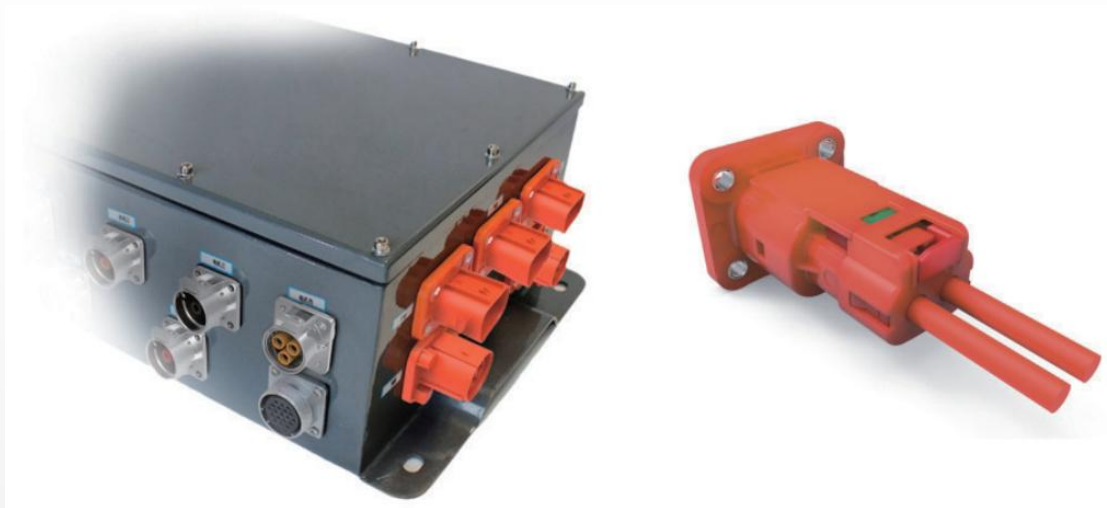

The main technical parameters:


- Model: GVA Series
- Wire cross section: 2.5mm², 4mm² single-core shielded wire
- Rated voltage: 1000V DC
- Rated current: 30A Max.
- Temperature rating: -40°C~140°C (Including temperature rise)
- Protection level: IP68, IP6K9K, IPXXB, IPXXD
- Shielding: 360° shielding
- HVIL: yes
- Plug type: straight (2-core)
- Keys: A/B/C/D/E



Series name	GVA	GVA	082	A	-	31
Connector Type	082: 2-core socket					
Key	A/B/C/D/E					
Separator	-					
30A Series	30: Without HVIL ; 31: HVIL					

Series name	GVA	GVA	182	A	-	31	-	4
Connector Type	182: 2-core plug							
Key	A/B/C/D/E							
Separator	-							
30A Series	30: Without HVIL ; 31: HVIL							
Separator	-							
Adaptable Cable	4mm ² (2.5mm ² /4mm ² options)							

➡ MOUNTING PANEL SIZE

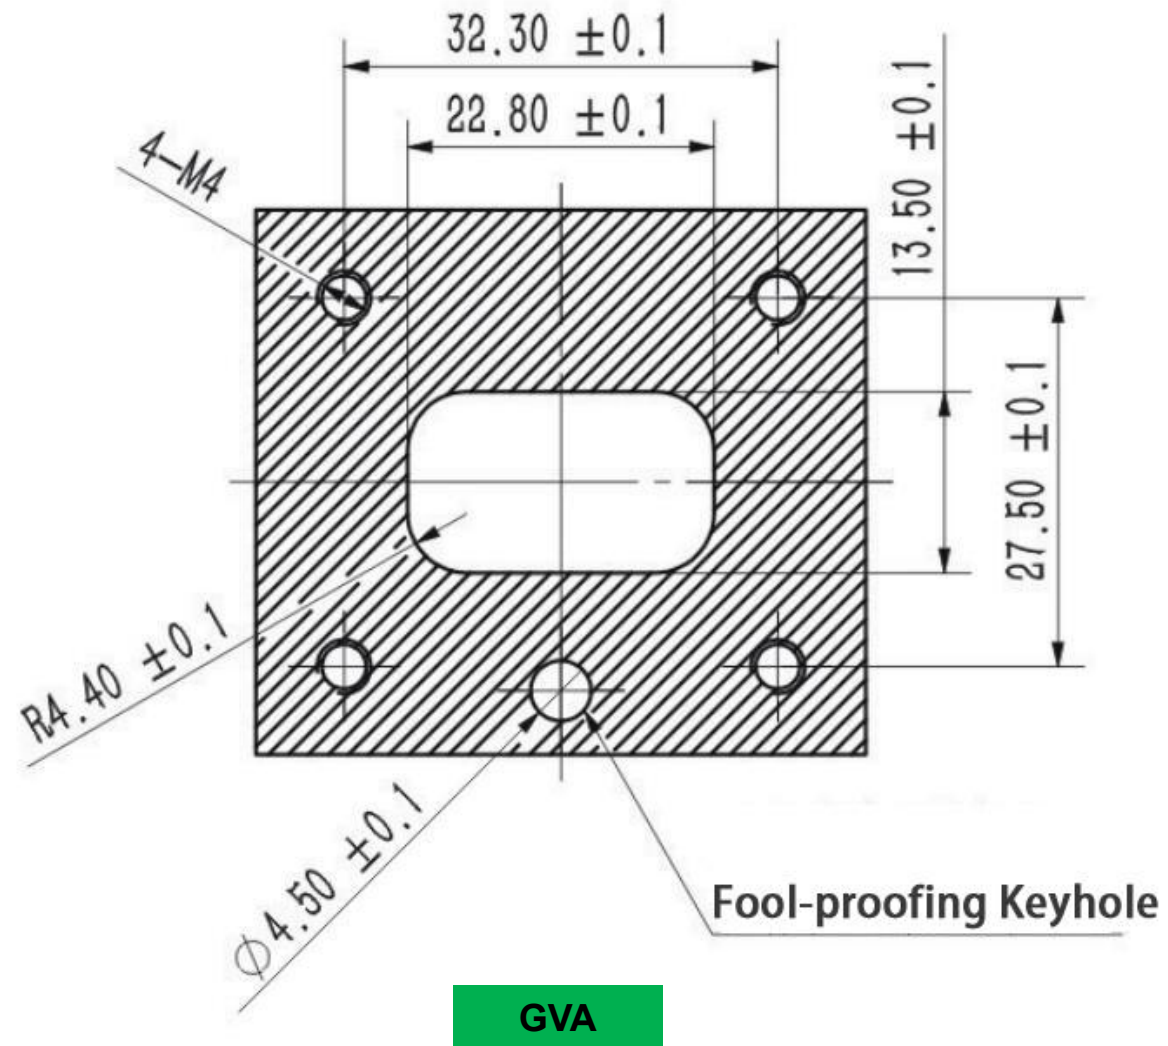



Custom Solution Provider

Address:

2A, Building 2, Hongji Xindu, Guanxing East Road, Longhua District,
Shenzhen, China

Email Address:

ec@guchen.com

Website: www.guchen-connector.com